

Analysis of Concentration Dependencies for an Optical Directional Coupler Design

Daniel Uebach, Thomas Kühler and Elmar Griese
Theoretical Electrical Engineering and Photonics, University of Siegen
 Siegen, Germany
 daniel.uebach@uni-siegen.de

Abstract—An integrated directional coupler is designed for a bidirectional communication on a single waveguide by separating both data streams within individual branches. Thereby, an adjustment of the numerical aperture of the transmitting branch is a promising optimization approach. As the couplers are manufactured by a field-assisted diffusion process the numerical aperture is directly related to the exchange ion concentration. The efficiency of the designed coupler and its optimization approaches is calculated with a geometrical optics algorithm.

I. INTRODUCTION

Optical intra-board links have been figured out as promising technology for future board level communication [1]. Integrated optical waveguides and devices are manufactured with a field-assisted diffusion process within thin glass sheets, which can be embedded as optical layers in conventional printed circuit boards [2]. Since space is limited at board level applications, a bidirectional communication on a single waveguide is required. Therefore, a directional coupler manufactured with a field assisted ion-exchange process is designed which realizes a separation of both transmission directions [3], [4].

II. DIRECTIONAL COUPLER DESIGN AND OPTIMIZATION

The directional coupler, which is designed for simultaneous bidirectional communication on a single waveguide, has the basic idea of extracting both signal directions by separating them into two individual branches. Therefore, a mask structure for a field-assisted ion exchange with different optimization approaches is investigated. As illustrated in Figure 1 the directional coupler consists of an S-bend which guides the received signals to the optical receiver and a straight waveguide branching that works as a transmitting branch.

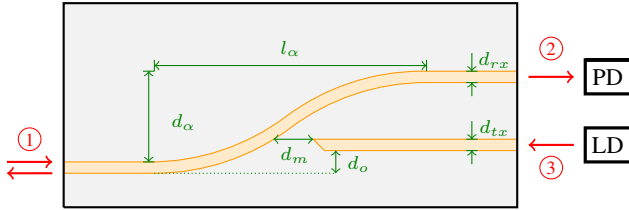


Fig. 1. Mask design of an S-bend with a branching and the optimization approaches of mask bridge d_m , coupling angle α and mask opening width of the transmitting branch d_{tx} .

The efficiency η of the designed couplers is determined by the forced losses in both transmission directions

$$\eta = \eta_{rx} \cdot \eta_{tx}. \quad (1)$$

Therefore different approaches to minimize damping are investigated. A mask bridge d_m between both branches, an offset d_o of the transmitting branch and the coupling angle $\alpha = \arctan(d_\alpha/l_\alpha)$ have already been characterized as promising optimization techniques in the previous works [3] and [5]. The exchange ion concentration c , that is related to the mask opening width d_{tx} as shown in Figure 2, is an additional promising technique to increase the efficiency of the designed coupler. Since the exchange ion concentration c is directly related to the refractive index [6]

$$n_s(\vec{r}) = n_{sub} + \Delta n_{ex} \cdot c(\vec{r}), \quad (2)$$

the numerical aperture of the transmitting branch can be modeled by a variation of d_{tx} .

III. MATHEMATICAL METHODS

For the investigation of concentration dependencies on the efficiency of the designed directional coupler's the field-assisted ion exchange is modeled by solving the continuity equation for the ionic flux [7]

$$\frac{\partial c}{\partial t} = \frac{D}{1 - \alpha c} \left(\Delta c + \frac{\alpha (\nabla c)^2}{1 - \alpha c} - \frac{q\vec{E}}{kT} \cdot \vec{\nabla} c \right) \quad (3)$$

with the finite-element-method. The geometrical dimensions of the manufactured waveguides are thereby mainly depending on the chosen process parameters of diffusion time t , electrical field strength E and process temperature T . The designed

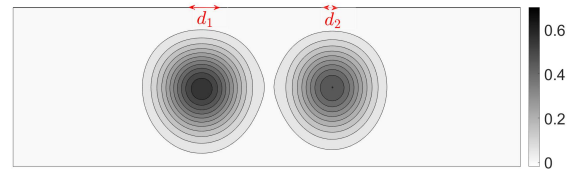


Fig. 2. Cross section of two waveguides manufactured with a field-assisted ion exchange from different mask opening widths d_1 and d_2 .

coupler, presented in this work, is modeled as a highly multimodal waveguide with large geometrical dimensions compared to the optical wavelength. For this reason, a geometrical optics algorithm solving the ray equation

$$\frac{d}{ds} \left(n \frac{dr}{ds} \right) = \nabla n(r) \quad (4)$$

is used as an efficient method for the loss calculation [8]. The ray extinction is thereby modeled as a gaussian pulse [9].

IV. INVESTIGATION SERIES AND CALCULATED RESULTS

For the purpose of optimizing the efficiency of the structure several approaches have been mentioned before. The mask bridge d_m which is modeled from $0\mu m$ to $500\mu m$ should realize a decoupling of both branches. For the bend angle $\alpha = 5^\circ$ is applied. Thereby, α mainly influences the losses in receiving direction [10]. For the investigation of concentration dependencies of the designed coupler the mask opening width d_{tx} of the transmitting branch is varied in a range of $1\mu m$ to $3\mu m$. This leads to a smaller numerical apertures of the transmitting that should increase the efficiency in receiving direction. The transmitting branch offsets are varied from $0\mu m$ to $20\mu m$. In Figure 3, the calculated efficiencies are visualized in both directions, wherein the receiving direction is continuously represented and the transmitting direction is dashed. Figure 3 shows that smaller mask openings d_s of the transmitting branch lead to higher efficiencies, especially in sending direction (TX) for small offsets d_o . For larger offsets d_o , the effect of mask opening width d_{tx} decreases because the efficiencies converge faster against their final value for increasing mask bridges d_s . From a multiplication of the curves in both directions the overall efficiency η can be derived which is shown in Figure 4. By reducing the mask opening width d_{tx} of the transmitting branch, an increase of the overall efficiency can be achieved for larger offsets d_o . A maximum overall efficiency of 67.4% can be achieved with a mask opening width of $d_{tx} = 1\mu m$ compared to 61.3% which has been the maximum efficiency in further investigations [3].

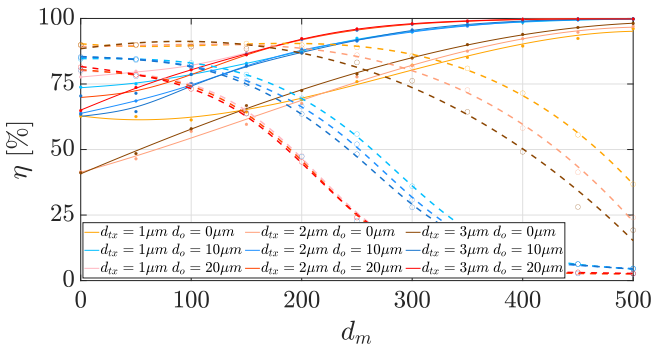


Fig. 3. Calculated efficiencies in receiving direction (RX, continuous) and transmitting direction (TX, dashed) that is depending on various optimization parameters.

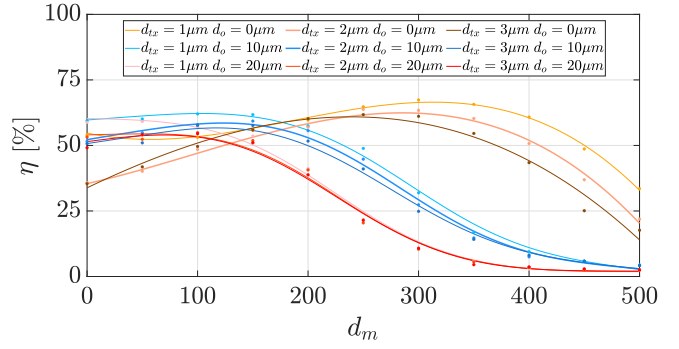


Fig. 4. Calculated overall efficiency η that is derived by a multiplication of the efficiencies η_{rx} and η_{tx} in both directions.

V. CONCLUSION

In this work a promising optimization approach for an integrated directional coupler which is manufactured by a field-assisted ion-exchange is presented. By reducing the mask opening width d_{tx} of the transmitting branch, the overall efficiency can be increased by 6.1% compared to previous results [3]. The numerical aperture of the transmitting branch is thereby adjusted by the mask opening width d_{tx} . This requires for further investigations a quantitative analysis of the refractive index profiles for different mask opening widths and a verification of the calculated results by measurements to evolve an optimized directional coupler structure.

REFERENCES

- [1] E. Griesse, "A High-Performance Hybrid Electrical-Optical Interconnection Technology for High-Speed Electronic Systems", *Advanced Packaging IEEE Transactions on*, vol. 24, no. 3, pp. 375-383, Aug 2001.
- [2] H. Schröder, L. Brusberg, N. Arndt-Staufenbiel, K. Richlowski, C. Ranzinger and K. Lang, "Advanced thin glass based photonic PCB integration," 2012 IEEE 62nd Electronic Components and Technology Conference, San Diego, CA, 2012, pp. 194-202.
- [3] D. Uebach, T. Kühler and E. Griesse, "Efficiency Comparison of Directional Optical Couplers in Thin Glass Sheets Manufactured by a Field-Assisted Diffusion Process," 2020 IEEE 24th Workshop on Signal and Power Integrity (SPI), Cologne, Germany, 2020.
- [4] J. H. Stosch, T. Kühler and E. Griesse, "Optical directional coupler for graded index waveguides in thin glass sheets for PCB integration," 2016 IEEE 20th Workshop on Signal and Power Integrity (SPI), Turin, 2016, pp. 1-4.
- [5] J. H. Stosch, T. Kühler and E. Griesse, "Analysis of optical directional couplers in thin glass sheets for PCB integration," 2017 IEEE 21st Workshop on Signal and Power Integrity (SPI), Baveno, 2017, pp. 1-4.
- [6] R. Rogozinski, "Ion-exchange in Glass – The Changes of Glass Refraction", Ion-exchange Technologies, 2012.
- [7] P. Mrozek, "Numerical and experimental investigation on Ag+–Na+ field assisted ion-exchanged channel waveguides," *Appl. Opt.* 51, 4574-4581 (2012).
- [8] Y. Sönmez, A. Himmler, E. Griesse, and G. Mroczynski, "A ray tracing approach to model wave propagation in highly multimode graded index optical waveguides," *Int. Journal of Applied Electromagnetics and Mechanics*, vol. 17, no. 1-3, 2003.
- [9] A. Ankiewicz, C. Pask, "Geometric optics approach to light acceptance and propagation in graded index fibres", *Opt. Quant. Electron.* 9, 87-109, 1977.
- [10] J. T. A. Carriere, J. A. Frantz, B. R. West, S. Honkanen, and R. K. Kostuk, "Bend loss effects in diffused, buried waveguides," *Appl. Opt.* 44, 1698-1703, 2005.