

# Optimization of Two-Dimensional Photonic Crystals with Artificial Bee Colony Algorithm

Mailson G. da Silva and Gilliard N. Malheiros-Silveira

São Paulo State University (UNESP), Campus of São João da Boa Vista, São Paulo 13876-750, Brazil

Email: gnmsilveira@gmail.com

**Abstract-** We applied the Artificial Bee Colony algorithm for the complete band gap maximization of a two-dimensional photonic crystal. The band diagram and band gap calculation were carried out by the software MIT Photonic Bands, and these results were used in the algorithm's fitness function. The optimum structure was compared to the literature which used genetic algorithm, and it was observed a raise in the complete band gap of the photonic crystal.

## I. INTRODUCTION

Photonic Crystals (PhCs) are periodic structures formed by materials with different dielectric constants and can be used to control the flow of light. It can occur in 1, 2 or 3 dimensions [1]. Such PhCs may have photonic band gaps (PBG), which are frequencies where the light is prohibited to propagate, i.e., the PhCs act as a perfect mirror comprised of dielectric material. When the PBG is polarization independent, it is said that PhC has a complete PBG (CPB). In 2-D PhC the CPB occurs when the transverse electric (TE) mode band gap overlaps the transverse magnetic (TM) mode, and vice-versa.

Many optical components can be designed as filters, waveguides, among others, by the PBG engineering, once this region inhibits radiation losses [2]. Therefore, structures with large PBGs may be interesting to design novel wideband devices. Additionally, there are many factors that influence the formation of PBG, e.g.: lattice type, geometry, kind of material, symmetry reduction, and index refraction [1]. All these factors create a huge combinational problem, demanding a search mechanism that can explore in an efficient way the possibilities with the lower computational effort.

In this context, many research groups applied bio-inspired algorithms, as [3] where the genetic algorithm (GA) is used in the discrete domain to optimize CBG, [4] also uses GA for optimization through an inverse problem, in [5] it was used an immune artificial network, and [6] an artificial bee colony (ABC) algorithm for PBG optimization by inverse problem in the discrete domain.

Thus, this work aims to use the ABC algorithm in the continuum domain to maximize the CPB in a two-dimensional PhC, composed of air and silicon rods in a square lattice. The software MIT Photonic Bands (MPB)[7] was applied for the electromagnetic calculation.

## II. METHODS

The ABC algorithm [8] was inspired by the search food process made by swarm bees called foraging, and it is formed by three groups of bees: scouts, employees, and onlookers. In the beginning, the scout bees search randomly food sources (possible problem solution), next the employee bees explore the neighborhood of the sources found by the scouts. Using the sources' qualities of the employees, the onlooker bees choose which one will be explored (exploitation). When a source cannot be improved after a number *limit* of attempts, its employee bee becomes a scout bee; which will start to search for a new food source randomly.

In this work, each food source is a vector that contains the centers and radii of each rod of the PhC unit cell. The fitness function is given by the gap-to-midgap ratio (1):

$$fit = (E_{top} - E_{bottom})/E_{middle}, \quad (1)$$

where  $E_{top}$ ,  $E_{bottom}$  and  $E_{middle}$  are respectively, the lower frequency of the higher mode, the upper frequency of the lower mode, and the average between the two previous frequencies. The band diagram is calculated by MPB software.

The unit cell of the PhC was comprised by two silicon rods with index refraction  $n=3.476$ , filled by air, and organized in a square lattice. The results were compared with the ones in [3] for the two rods case.

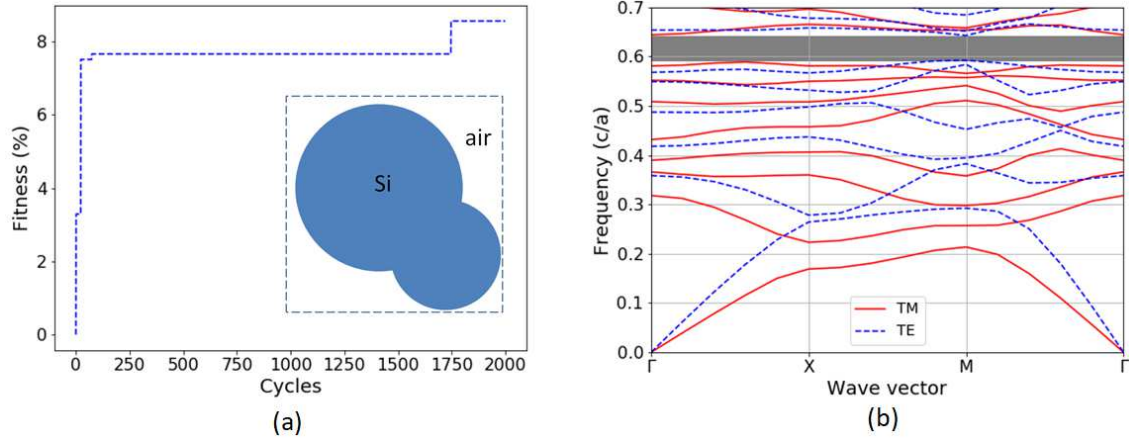


Fig. 1. a) Convergence curve of ABC algorithm. Inset shows the optimum unit cell obtained from the ABC code. b) Diagram band of the unit cell in a).

### III. RESULTS

One PhC configuration can have more than one CBG and, in this work, it was considered always the larger one. For the diagram bands, the MPB has been configured to consider 15 bands in the calculations for TE and TM modes. In table I, it is depicted the ABC algorithm parameters and corresponding values.

TABLE I  
PARAMETERS OF ABC ALGORITHM

| Parameter     | Value |
|---------------|-------|
| Employee bees | 10    |
| Onlooker bees | 10    |
| Limit         | 10    |
| Cycles        | 2000  |

In the convergence curve, shown in Fig. 1(a), one can observe that the best result was achieved around 1746 cycles; it suggests an even better result could be reached assuming more cycles. Inset shows the ultimate unit cell got from ABC code. The centers and radii of the rods are  $\{P_1 (0.2022, 0.2305), r_1 = 0.2281\}$  and  $\{P_2 (-0.0703, -0.0641), r_2 = 0.3410\}$ .

Fig. 1(b) shows the band diagram for the optimal PhC with a bandwidth of 8.17%. The PBG is located between 6th-7th TE mode and 8th-9th TM mode. The CBG obtained in [3] was 7.2% thus it becomes evident the better result of ABC that obtained a band gap structure nearly 13.5% larger.

### IV. CONCLUSION

In this work, ABC was used in the continuum domain for optimizing the CBG for 2D PhC with two Si rods embedded in air. As result, it was obtained a structure with a larger band gap when compared with [3] that used GA. This showed the capability of the ABC algorithm to explore the search space

avoiding the local optima for complex multimodal functions. Therefore, the ABC is an algorithm of simple implementation but with great optimization power, being an efficient way to search for PhCs with larger PBGs.

### ACKNOWLEDGMENT

G.N.M-S thanks the Fundação de Amparo à Pesquisa do Estado de São Paulo (FAPESP) under Project 2015/24517-8, and the INCT/CNPQ/FAPESP Fotonicom.

### REFERENCES

- [1] J. D. Joannopoulos, R. D. Meade, and J. N. Winn, *Photonic Crystals, Molding the Flow of Light*, Princeton, NJ: Princeton Univ. Press, 1995.
- [2] R. D. Meade, A. M. Rappe, K. D. Brommer, and J. D. Joannopoulos, "Nature of the photonic band gap: some insights from a field analysis," *J. Optical Society of America B*, vol. 10, no. 2, pp. 328-332, February 1993.
- [3] H. Li, L. Jiang, W. H. Qiang, X. Li, "Genetic optimization of two-dimensional photonic crystals for large absolute band-gap," *Elsevier Optics Communications*, vol. 282, issue 14, pp. 3012-3017, July 2009.
- [4] G. N. Malheiros-Silveira, V. F. Rodríguez-Esquerre, H. E. Hernandez-Figueroa, "Strategy of search and refinement by GA in 2-D photonic crystals with absolute PBG," *IEEE J. Quantum Electron*, vol. 47, no. 4, pp. 431-438, April 2011.
- [5] A. D. S. Ferreira, G. N. Malheiros-Silveira, and H. E. Hernandez-Figueroa, "Maximizing complete band gaps in two-dimensional photonic crystals by using artificial immune network," in *SBMO/IEEE MTT-S International Microwave and Optoelectronics Conference (IMOC)* (2015), pp. 1-4.
- [6] G. N. Malheiros-Silveira, and F.G Delalibera, "Inverse design of photonic structures using an artificial bee colony algorithm," *Applied Optics*, vol.59, no.13, pp 4171-4175, May 2020.
- [7] S. G. Johnson and J. D. Joannopoulos, "Block-iterative frequency-domain methods for Maxwell's equations in a plane-wave basis," *Opt. Express*, vol. 8, no. 3, pp. 173-190, 2001.
- [8] D. Karaboga and B. Basturk, "A powerful and efficient algorithm for numerical function optimization: artificial bee colony (ABC) algorithm," *J. Global Optimiz.* 39, pp. 459-471, 2007.